


# MT-2000

## POWER MULCHER

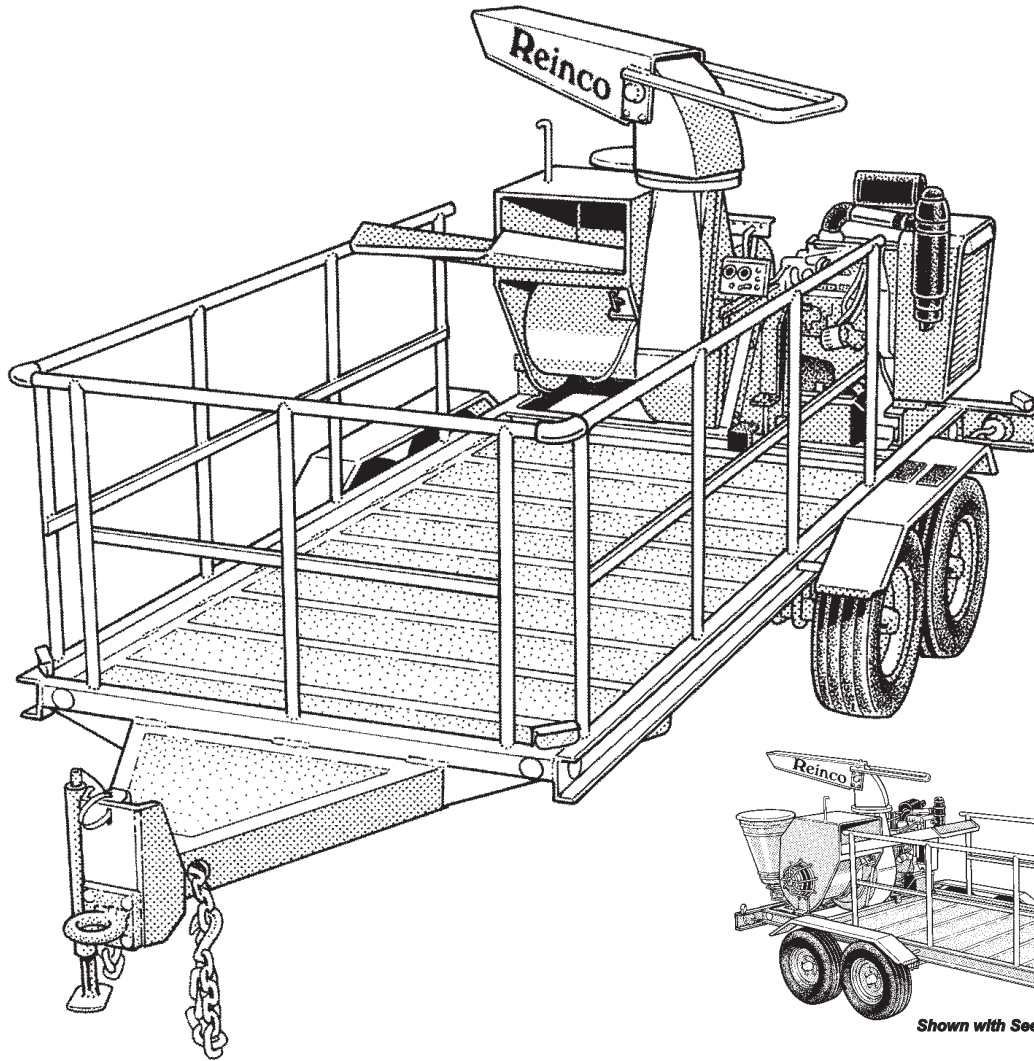

- COMBINATION TM-35 POWER MULCHER AND MATERIAL TRAILER
- 14 FT WORK DECK AREA CARRIES UP TO 1 TON OF MATERIAL
- REMOVABLE FORWARD RAIL FACILITATES MATERIAL LOADING
- DISCHARGE UP TO 65 FEET IN STILL AIR
- HEAVY DUTY TANDEM TRAILER PACKAGE
- EXCLUSIVE TWO YEAR POWER MULCHER WARRANTY

# Reinco

Power Mulching & Hydrograssing Machinery  
Reinco Inc. • PO Box 512 • Plainfield, NJ 07061-0512

Phone (800) 526-7687  
Local (908) 755-0921  
Fax (908) 755-6379  
[www.reinco.com](http://www.reinco.com)

# POWER MULCHER • MODEL MT-2000

The MT-2000 Mulcher Trailer offers versatility to your machine with this durable trailer package. Up to one ton of hay or straw bales can be carried along on the trailer bed to handle jobs where big trucks or material trailers are prohibitive. The tandem axles can traverse sites not suitable for single axle arrangements. Combining over forty years of experience in this specialized field, Reinco's commitment to customer service, and with an industry leading two year power mulcher warranty, your satisfaction can be assured. For years of dependability, demand Reinco Power Mulching machinery!

## FEATURES

This versatile unit combines the TM-35 model Power Mulcher, and a heavy duty tandem trailer with the capacity to carry up to a ton of additional baled materia, all in one package. The tandem axle configuration provides a minimum of tracking on sites which allow limited access for trucks, materials trailers and the like.

The MT-2000 is a self-contained, trailered machine consisting of electrically welded modular components secured with plated self-locking fasteners, mounted on a fabricated steel base. Structural frame offers fixed work deck with slip free footing and 40" safety railings. The forward rail is removable to make material loading quick and easy. Standard hitch is an adjustable lunette eye style [19-1/2" to 28-1/2"], with 3/8" safety chain and clevis'.

Manually fed flakes of average dry mulch results in an output of up to seven tons per hour. Direct discharge range in still air is 65 feet. Patented high volume beater drum (thrashing chamber) with raised inlet is contoured to eliminate debris kick back and configured to place flailing stations below line of sight.

Engine power is reliably transmitted directly via flexible coupling to the blower. As with all Reinco Power Mulchers, our proven direct drive eliminates chains, belts, or clutches, and puts all the engine power to work! Fully adjustable flail stations are mounted in common on the heavy-duty beater shaft. Access for flail adjustment is through removable rear drum panel.

Formed cold finish steel discharge boom with center pivot bearings and heavy formed handle bar provides responsive 60° control of vertical placement. Discharge assembly mounts to self-lubricating nylon slew bearing for unrestricted 360° horizontal rotation. Rolling polyurethane top and bottom seals with stainless steel side wipers insure operator comfort.

Four cylinder, heavy-duty, water cooled engine, equipped with 12v ignition, battery, alternator and starter, and two-year manufacturer commercial engine warranty. Supplied with dual element dry type air cleaner, governor and chaff screen as standard. Keyed ignition, hourA quick setting vernier type, weather-proof throttle is mounted for operator access. Foot operated signal horn provides on site communication between vehicle operator and crew. Fuel tank capacity is 12 gallons.

Machine primed and sanded, then finished with Reinco lead free yellow modified acrylic final topcoat. Accessories are furnished plated or finish painted; complete with operating and safety decals.

All Reinco machinery is factory tested and shipped complete and ready to work.

## THE COMPLETE REINCO PRODUCT LINE:

### HYDROGRASSERS:

8 Models, 200 to 3000 gallon working capacity.

### POWER MULCHERS:

5 Models, 1-1/2 to 20 tons per hour mulch output.

### Tracer Tackifier:

Tack over hay/straw or as a binder for fiber mulch.

## SPECIFICATIONS

### SIZE:

Length 19'-6" (5.94 m), Width 7'-6" (2.4 m), Height 7'-2-1/2" (2.2 m)

### WEIGHT:

Standard unit is 2800 lbs. (1270 kg) Tongue weight empty is 125 lbs.(56.6)

### DECK and RAILINGS:

Electrically welded full plate work area coated for slip resistance. Fixed integrally welded 40" high side railings, with removable forward rail surround the work area. Corner connectors facilitate removal of front rail for material loading, then easy replacement for transport.

### TRAILER:

Straight frame type, 3500 lb. pre-cambered axles with steel shackle type spring assembly, 1000 lb. swing jack, safety chain, Adjustable lunette eye type coupler, fenders, bumper, electric brakes with brake-away, and 6 conductor wiring connector to tow vehicle are standard. DOT lighting, FMVSS vehicle identification. ST225/75R15 8 ply radial tires.

## OPTIONAL EQUIPMENT

### HOSE PLACEMENT:

Remote discharge kit includes 25 ft. of 8" helically wound, flexible urethane cuffed hose, boom discharge adapter and hand held discharge playpipe. Connect additional 25 ft. hose sections for extended placements.

### VACUUM KIT:

Adapter kit converts beater drum to suction chamber for leaf, mulch and light debris pick-up. Attach up to 50 ft. of 8" hose. The discharge playpipe is designed to double as a pick-up nozzle.

### SEED DISTRIBUTOR:

2.0 bu. broadcast type distributor provides uniform placement of dry granular materials for simultaneous seeding and fertilizing.

### TRAILER OPTIONS:

Hydraulic brakes  
2-5/16" adjustable ball hitch

Call about your specific application requirements!

# Reinco

Power Mulching & Hydrograssing Machinery  
Reinco Inc. • PO Box 512 • Plainfield, NJ 07061-0512

Phone (800) 526-7687  
Local (908) 755-0921  
Fax (908) 755-6379  
[www.reinco.com](http://www.reinco.com)